


Copyright FCI.

										2												
PRODUCT NO.	ROW S		HIGH POWER SIGNAL HIGH POW								wer											
PRUDULI NU.	KUW S	E1	P1	P2	Ρ3	Ρ4	P5	1	2 3	4 5	6	7 8	9	10 11	12	P6	P7	P8	P9	P10	E2	
10106129-A012001LF	D C B A		H 4	H4	H4	H4	H4	G (G (G (G (3 G 3 G 3 G 3 G	G G G G G G	G (G (G () G) G) G) G	G G G	G G G G G G G G	G G G	H4	H4	H4	H4	H4		L T

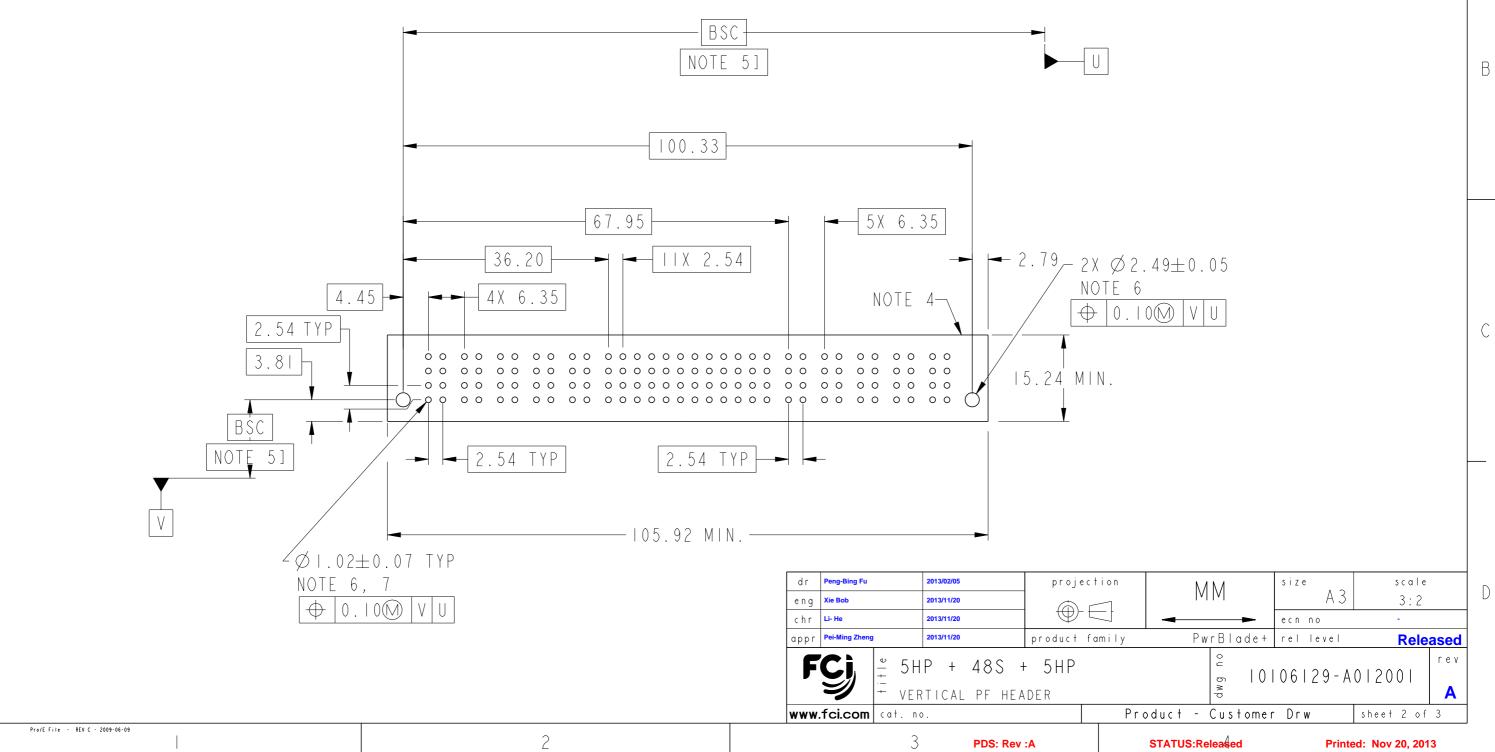

3

В

А

С

[]

Copyright FCI.

D

4

CODE	DESCRIPTION	
G	STD SIGNAL CONTACT	
H 4	STD HIGH POWER CONTACT'	
НА	METAL HOLD DOWN	
		A

Ø2.49±	0.	05
6		
). 0M	V	U

STATUS:Released

Printed: Nov 20, 2013

3

NOTES:

- I) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE. THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - -HOUSING GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0. -SIGNAL CONTACT - COPPER ALLOY. -POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.

2

- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) I.I5±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658. APPLICATION SPECIFICATION REFER TO FCI GS-20-141. PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.

	3	PDS: Rev			STATUS:R		Duint	ed: Nov 20, 201	
www	fci.com cat. n	٥.		Pro	oduct –	Customer	· Drw	sheet 3 of	3
F		IP + 48S + rtical pf hea					06 29-A	0 200	Α
C			EUD			o c			rev
appr	Pei-Ming Zheng	2013/11/20	product fa	ımily	P۱	wrBlade+	rel level	Rele	ased
chr	Li- He	2013/11/20		\Box	-		ecn no	-	
eng	Xie Bob	2013/11/20		-		(V	A 3	3:2	
dr	Peng-Bing Fu	2013/02/05	project	ion	L N	1 M	size	scale	

С

FCI

Copyright

D

В

А

А

В

С